


Tripod



- Linkage head with swivelling suspension eye
- Adjustable spreading width to the limit stop
- Foot discs prevent penetration into soft ground

Aluminium Tripod



Specification:

The aluminium tripod is adjustable in height and can easily be transported once all supports have been pushed in. The tripod is equipped with a swivelling suspension eye which fits with any lifting equipment. The supports are made from aluminium tubes.


Standard design: telescopic, with spikes, without lifting equipment.

Accessories: Upon request the tripod can be equipped with rubber plates and/or safety chain instead of spikes.

Order No.	Model	Carrying Capacity	Length Of Support L Min./Max.	Clearance Height * H Min./Max.	Spreading Width* B Min./Max.	Weight Approx.
140 001	D-250	250 kg	1,18 / 1,88 m	0,94 / 1,58 m	0,95 / 1,50 m	10 kg
140 003	D-500	500 kg	1,50 / 2,50 m	1,15 / 2,05 m	1,20 / 1,95 m	17 kg
140 033	D-500/EN795 [†]	500 kg	1,50 / 2,50 m	1,15 / 2,05 m	1,20 / 1,95 m	17 kg
140 008	D-1000	1.000 kg	1,78 / 3,00 m	1,38 / 2,54 m	1,65 / 2,35 m	27 kg

[†] with approval to transport people according to EN 795. Equipped with rubber plates and safety chain. * Max. width adjustment (30°).

Steel Tube Tripod

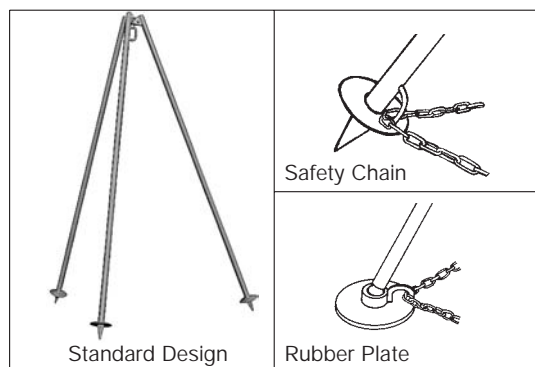

Specification:

The steel tube tripods are equipped with a swivelling suspension eye and they are designed for versatile use. The continuous width adjustment is possible right up to the limit stop.

Colour coating: orange, RAL 2000.

Standard design: with spikes, without lifting equipment, integral design.

Special design: tripod D-1-..., split design for easy transport.

Also available with telescopic adjustment.

Integral Design							Split Design					
Order No.	Model	Carrying Capacity kg	Length Of Support L m	Max. Height * m	Spread Width m	Weight kg	Order No.	Model	Partial Length lo, lu m	Height H Max.* m	Height H Min.** m	Weight kg
140 005	D-525	500	2,5	1,92	2,0	28	140 006	D-1-525	1,48	1,92	1,04	33
140 010	D-530	500	3	2,36	2,4	31	140 011	D-1-530	1,73	2,36	1,26	37
140 015	D-540	500	4	3,22	3,3	48	140 016	D-1-540	2,29	3,22	1,74	53
140 020	D-550	500	5	4,10	4,2	65	140 021	D-1-550	2,79	4,10	2,17	82
140 055	D-1030	1000	3	2,36	2,5	41	140 056	D-1-1030	1,73	2,36	1,26	46
140 060	D-1040	1000	4	3,22	3,3	59	140 061	D-1-1040	2,29	3,22	1,74	72
140 065	D-1050	1000	5	4,10	4,2	81	140 066	D-1-1050	2,79	4,10	2,17	103
140 155	D-2040	2000	4	3,18	3,3	76	140 156	D-1-2040	2,29	3,18	1,70	87
140 160	D-2050	2000	5	4,05	4,2	105	140 161	D-1-2050	2,82	4,05	2,16	126
140 205	D-3040	3000	4	3,08	3,3	95	140 206	D-1-3040	2,33	3,08	1,60	125
140 210	D-3050	3000	5	3,95	4,2	129	140 211	D-1-3050	2,82	3,95	2,06	155

* Max. width adjustment (30°).

** Difference H max. / H min. - telescopic height adjustment available (additional charge).

Special designs available: e.g. larger carrying capacity, longer supports, rubber plates, safety chain, galvanized design, ...